




PART NUMBER:	DATE:
PROJECT #:	TYPE:
PREPARED BY:	

## F4P COPPER SPLIT BOLTS TECHNICAL DATA SHEET

### PRODUCT DESCRIPTION

These solderless service split-bolt connectors are made of high-strength copper alloy and are used for copper and copperweld wire connections.

Suitable for direct burial in earth and concrete through 500 kcmil.

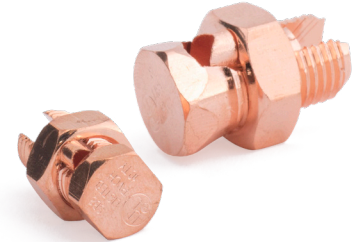

### FEATURES

- High Strength Solderless Service Connector Made of High-Copper Alloy for Copper and Copperweld Wires.
- Type for Two Maximum Wire Sizes.

### STANDARDS & SPECIFICATIONS

UL Reference Number E475703

MADE IN INDIA

### PHYSICAL SPECIFICATIONS

PART NUMBER	COPPER CONDUCTOR		MIN. TAP WITH ONE MAX MAIN	MAXIMUM CONDUCTOR COPPERWELD		WIRE DIA. RANGE (IN.)	REC. TORQUE (IN. LB.)
	RANGE OF EQUAL MAIN & TAP (MIN.)	RANGE OF EQUAL MAIN & TAP (MAX.)		STR.	TYPE A		
F4P SB8UL	16 STR	8 STR	16 STR	-	-	0.057 - 0.145	80
F4P SB6UL	10 SOL	6 SOL	16 SOL	-	-	0.102 - 0.162	165
F4P SB4UL	8 SOL	4 SOL	16 SOL	3 NO. 12	8A	0.128 - 0.204	165
F4P SB2UL	6 SOL	2 STR	14 STR	3 NO. 7	3A	0.162 - 0.292	275
F4P SB1/0UL	4 SOL	1/0 STR	14 SOL	3 NO. 6	2A	0.204 - 0.375	385
F4P SB2/0UL	2 SOL	2/0 STR	14 STR	3 NO. 5	-	0.258 - 0.413	885
F4P SB3/0UL	2 SOL	3/0 STR	12 SOL	7 NO. 7	-	0.258 - 0.470	500
F4P SB250UL	1/0 SOL	250 MCM	10 SOL	7 NO. 5	-	0.325 - 0.575	650
F4P SB350UL	4/0 STR	350 MCM	8 SOL	19 NO. 7	-	0.528 - 0.682	650
F4P SB500UL	250 MCM	500 MCM	8 SOL	19 NO. 6	-	0.575 - 0.815	825



PART NUMBER:	DATE:
PROJECT #:	TYPE:
PREPARED BY:	

## ORDERING INFORMATION

PART NUMBER	STOCK CODE	DESCRIPTION	CASE QTY.
F4P SB2UL	0302-7510	2 AWG COPPER SPLIT BOLT	100
F4P SB4UL	0267-0813	4 AWG COPPER SPLIT BOLT	100
F4P SB6UL	0267-0816	6 AWG COPPER SPLIT BOLT	75
F4P SB8UL	0267-0819	8 AWG COPPER SPLIT BOLT	40
F4P SB1/0UL	0302-7513	1/0 AWG COPPER SPLIT BOLT	20
F4P SB2/0UL	0302-7516	2/0 AWG COPPER SPLIT BOLT	15
F4P SB3/0UL	0302-7519	3/0 AWG COPPER SPLIT BOLT	10
F4P SB250UL	0302-7522	250 MCM COPPER SPLIT BOLT	6
F4P SB350UL	0302-7525	350 MCM COPPER SPLIT BOLT	4
F4P SB500UL	0302-7528	500 MCM COPPER SPLIT BOLT	3

*Application and Performance Specification is Subject to Change Without Notification.*

## RESOURCES

**MSDS/EDS/PRODUCT DATA SHEETS:** [f4p-usa.com](http://f4p-usa.com)      **CUSTOMER SERVICE:** 772-408-5211

## DISCLAIMER

Recommendations for use of this product are based on tests we believe to be reliable. Manufacturer and seller are not responsible for results where this product is used under conditions beyond our control. If when applied as directed, this material peels, cracks or separates, it will be replaced without charge upon presentation of proof of purchase and used cartridge. This limited warranty only applies to residential use and damages including consequential damage and other remedies. No other warranties apply, including fitness for a particular purpose.